

# You Don't Need to Speak Chinese...

FRRL Program  
September 2013  
AH6EZ

# Things to realize or remember

- Bad Karma – you are motivated by greed
- These radios are almost disposable
  - Forget about warranty or service
- Accept any flaws – you got what you paid for
- Nothing to do with Buy American
- Make sure you have a Yaesu or Icom also

# Various Chinese Dual Band Portables

- Baofeng
  - UV-5R+(Amazon) \$46
  - UV-5RA(Amazon) \$28
  - UV-3R \$50
  - UV5RC \$60
- Wouxun
  - KG-UVD1P \$120
  - KG-UV6D \$140
- QuanSheng
  - TG-UV2 \$110
- Chierda
  - CD-UV55 \$130
- TYT
  - TH-UV3R (2m/220) \$60
  - TH-UVF1 \$109
  - TH-UVF9 (Blk LCD) \$80
  - TH-UV3R \$60
- KYD
  - iP-UV1A (H<sub>2</sub>O proof) \$130
  - IP-670UV (H<sub>2</sub>O proof) \$110
- Puxing
  - PX-888K \$90
- Tonfa
  - UV-985 (8W) \$80
- USB Programming cable \$4

# Issues with Chinese Radios?

- Spurious Emissions – Variable (my Baofeng barely ok at -44dBc)
- Overall Quality – Getting better
- Programming Software
  - VIP free software unreliable but more radio specific
  - Chirp downloadable software ok for channels
  - USB drivers work for Win XP and 7 but need specific versions
- Warranty – poor to non-existent, sending back to China not practical
- Some both Part 97 and Part 90 (but rarely FRS/GRS)
- Some true dual monitor, mostly dual watch (scan)
- Some have FM broadcast
- Some have other features like scrambler, waterproof, more channels, larger display

# UV-5R Baofeng UV-5RPlus





## UV-5R<sup>+</sup> Plus

USER'S MANUAL  
BEDIENUNGSANLEITUNG  
MANUEL OPERATION

FC CE 0678



## CONTENT

1.-SAFETY INFORMATION	03
2.-FEATURES AND FUNCTIONS	03
3.-UNPACKING AND CHECKING EQUIPMENTS	04
4.- OPTIONAL ACCESSORIES	04
5.- INSTALLATION OF ACCESSORIES	05
5.1.- INSTALLING THE ANTENNA	05
5.2.- INSTALLING THE BELT CLIP	05
5.3.- MICRO-HEADSET INSTALLATION OF EXTERNAL	05
5.4.- BATTERY INSTALLATION	05
6.-BATTERY CHARGING	06
7.-BATTERY INFORMATION	07
7.1.-INITIAL USE	07
7.2.-BATTERY TIPS	07
7.3.-PROLONG BATTERY LIFE	07
7.4.-BATTERY STORAGE	08
8.-PARTS, CONTROLS AND KEYS	08
8.1.-RADIO OVERVIEW	08
8.2.- COMMAND/KEY DEFINITION	09
9.-'LCD' DISPLAY	10
10.- 1750 Hz TONE FOR ACCESS TO REPEATERS	11
11.- BASIC OPERATION	11
11.1.-RADIO ON-OFF/VOLUME CONTROL	11
11.2.- SELECTING A FREQUENCY OR CHANNEL	11
12.-ADVANCED OPERATION	11
12.1.-SET MENU DESCRIPTION	11
12.2.-SHORTCUT MENU OPERATION	13
12.3.-"SQL" (SQUELCH)	13
12.4.-FUNCTION "VOX" (VOICE OPERATED TRANSMISSION)	13
12.5.- SELECT WIDEBAND OR NARROW BAND "W/N"	13
12.6.-TDR (DUAL WATCH/DUAL RECEPTION)	13
12.7.- TOT(TRANSMISSION TIMER)	14
12.8.- CTCSS/DCS	14
12.9.- ANI	14
12.10.- DTMFST (DTMF TONE OF TRANSMITTING CODE)	14
12.11.- SC-REV(SCAN RESUME METHOD)	14
12.12.- PTT-ID(PTT OR RELEASE PTT TO TRANSMIT THE SIGNAL CODE)	15
12.13.-BCL(BUSY CHANNEL LOCKOUT)	15
12.14.- SFT-D(DIRECTION OF FREQUENCY SHIFT)	15
12.15.- OFFSET(FREQUENCY SHIFT)	15
12.16.-STE(STE TAIL TONE ELIMINATION)	15
13.-CTCSS TABLE	15
14.-DCS TABLE	16
15.-TECHNICAL SPECIFICATION	16
15.1.-GENERAL	16
15.2.- TRANSMITTER	17
15.3.- RECEIVER	17
16.-TROUBLESHOOTING	18
17.-WARRANTY	19

### 1.-SAFETY INFORMATION:

The following safety precautions shall always be observed during operation, service and repair of this equipment.

- This equipment shall be serviced by qualified technicians only.
- Do not modify the radio for any reason.
- Use only BAOFENG supplied or approved batteries and chargers.
- Do not use any portable radio that has a damaged antenna. If a damaged antenna comes into contact with your skin, a minor burn can result.
- Turn off your radio prior to entering any area with explosive and flammable materials.
- Do not charge your battery in a location with explosive and flammable materials.
- To avoid electromagnetic interference and/or compatibility conflicts, turn off your radio in any area where posted notices instruct you to do so.
- Turn off your radio before boarding an aircraft. Any use of a radio must be in accordance with airline regulations or crew instructions.
- Turn off your radio before entering a blasting area.
- For vehicles with an air bag, do not place a radio in the area over an air bag or in the air bag deployment area.
- Do not expose the radio to direct sunlight over a long time, nor place it close to heating source.
- When transmitting with a portable radio, hold the radio in a vertical position with the microphone 3 to 4 centimeters away from your lips. Keep antenna at least 2.5 centimeters away from your body when transmitting.



**WARNING:** If you wear a radio on your body, ensure the radio and its antenna are at least 2.5 centimeters away from your body when transmitting.

### 2.-FEATURES AND FUNCTIONS:

- Dual-band handheld transceiver with display function menu on the display "LCD".
- DTMF encoded.
- Lithium-ion battery with high capacity.
- Commercial FM radio receiver (65 MHz ~ 108 MHz).
- Incorporates 105 codes "DCS" and 50 privacy codes "CTCSS" programmable.
- Function "VOX" (voice operated transmission).
- Alarm function.
- Up to 128 memory channels.
- Broadband (Wide) / Narrowband (Narrow), selectable.
- High power / low (5 W/1 W) selectable.
- Display illumination and programmable keyboard.
- Function "beep" on the keyboard.
- Dual Watch/dual reception .
- Selectable Frequency Step 2.5/5/6.25/10/12.5/25 kHz.
- Function "OFFSET" (frequency offset for repeater access).
- Battery saving function "SAVE".
- Timer transmission "TOT" programmable.
- Selecting the Scan Mode.
- Function Busy Channel Lock "BCLO".
- Built-in RX CTCSS/DCS scan
- Built-in LED flashlight.
- Programmable by PC.

## 2.-FEATURES AND FUNCTIONS:


- Dual-band handheld transceiver with display function menu on the display "LCD".
- DTMF encoded.
- Lithium-ion battery with high capacity.
- Commercial FM radio receiver (65 MHz ~ 108 MHz).
- Incorporates 105 codes "DCS" and 50 privacy codes "CTCSS" programmable.
- Function "VOX" (voice operated transmission).
- Alarm function.
- Up to 128 memory channels.
- Broadband (Wide) / Narrowband (Narrow), selectable.
- High power / low (5 W/1 W) selectable.
- Display illumination and programmable keyboard.
- Function "beep" on the keyboard.
- Dual Watch/dual reception .
- Selectable Frequency Step 2.5/5/6.25/10/12.5/25 kHz.
- Function "OFFSET" (frequency offset for repeater access).
- Battery saving function "SAVE".
- Timer transmission "TOT" programmable.
- Selecting the Scan Mode.
- Function Busy Channel Lock "BCLO".
- Built-in RX CTCSS/DCS scan
- Built-in LED flashlight.
- Programmable by PC.



- Level Threshold "Squelch" adjustable from 0 to 9.
- Crossband reception
- Tone end of transmission
- Built-in key lock

### 3.-UNPACKING AND CHECKING EQUIPMENTS:


Carefully unpack the transceiver. We recommend that you identify the items listed in the following before discarding the packing material. If any items are missing or have been damaged during shipment, please contact your dealers immediately.

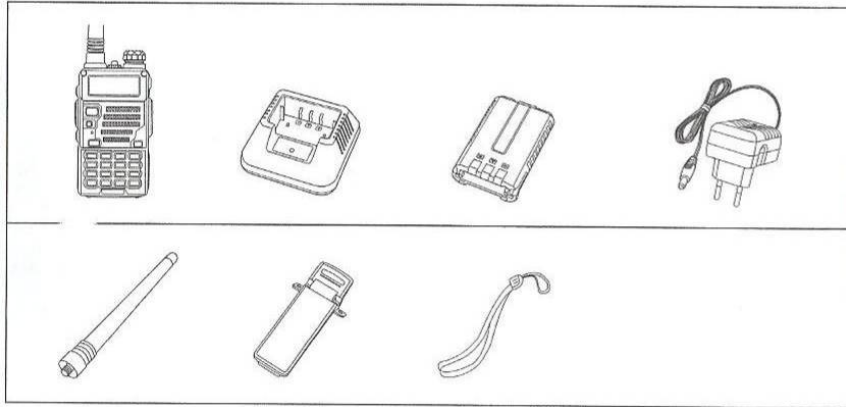

**Note:**

- Items included in the package, may differ from those listed in the table above depending on the country of purchase. For more information, consult your dealer or vendor.

### 4.- OPTIONAL ACCESSORIES:

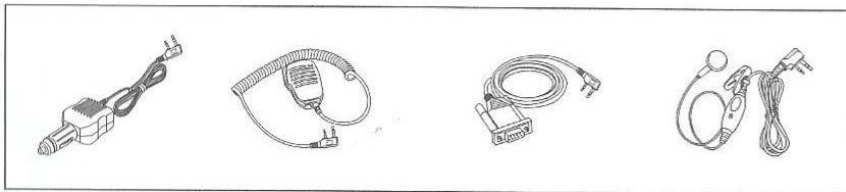

**Note:**

- Consult the dealer or retailer for information about options available.


### 5.- INSTALLATION OF ACCESSORIES:

#### 5.1.- INSTALLING THE ANTENNA:

Install the antenna as shown in the figure below and turn it clockwise until it stops.

**Note:**

- When installing the antenna, don't rotate it by its top, holding it by its base and turn.
- If you use an external antenna, make sure the 'SWR' is about 1.5:1 or less, to avoid damage to the transceiver's final transistors.
- Do not hold the antenna with your hand or wrap the outside of it to avoid bad operation of the transceiver.
- Never transmit without an antenna.



#### 5.2.- INSTALLING THE BELT CLIP:

If necessary, install the belt clip at the rear of the battery compartment cover as shown in the figure below.


**Note:**

- Do not use any kind of glue to fix the screw on the belt clip. The solvents Glue may damage the battery casing.




#### 5.3.- MICRO-HEADSET INSTALLATION OF EXTERNAL:

Plug the external micro-headset connector into the jack of 'SP. & MIC' of the transceiver as shown in the figure below.



#### 5.4.- BATTERY INSTALLATION:

- When attaching the battery, make sure the battery is in parallel and in good contact with the aluminum chassis. The battery bottom is about 1 to 2 centimeters below the bottom of the radio's body.
- Align the battery with the guide rails on the aluminum chassis and slide it upwards until a 'click' is heard.
- The battery latch at the bottom locks the battery.



- Turn off the radio before removing the battery.
- Slide the battery latch, at the bottom of the radio's body, in the direction indicated by the arrow.
- Slide down the battery for about 1 to 2 centimeters, and then remove the battery from the radio's body.



#### 6.-BATTERY CHARGING:

Use only the charger specified by the manufacturer. The charger's LED indicates the charging progress.

CHARGING STATUS	LED INDICATION
Standby (no-load)	Red LED flashes, while Green LED glows
Charging	Red LED solidly glows
Fully Charged	Green LED solidly glows
Error	Red LED flashes, while Green LED glows



Please follow these steps:

1. Plug the power cord into the adapter.
2. Plug the AC connector of the adapter into the AC outlet socket.
3. Plug the DC connector of the adapter into the DC socket on the back of the charger.
4. Place the radio with the battery attached, or the battery alone, in the charger.
5. Make sure the battery is in good contact with the charging terminals. The charging process initiates when the red LED lights.
6. The green LED lights about 4 hours later indicating the battery is fully charged. Then remove the radio with the battery attached or the battery alone from the charger.

#### 7.-BATTERY INFORMATION:

##### 7.1.-INITIAL USE

New batteries are shipped uncharged fully from the factory. Charge a new battery for 5 hours before initial use. The maximum battery capacity and performance is achieved after three full charge/discharge cycles. If you notice the battery power runs low, please recharge the battery.



**WARNING:** -To reduce the risk of injury, charge only the battery specified by the manufacturer. Other batteries may burst, causing bodily injury and property damage.  
-To avoid risk of personal injury, do not dispose of batteries in a fire!

- Dispose of batteries according to local regulations (e.g. recycling). Do not dispose as household waste.
- Never attempt to disassemble the battery.

##### 7.2.-BATTERY TIPS:

1. When charging your battery, keep it at a temperature among 5°C - 40°C. Temperature out of the limit may cause battery leakage or damage.
2. When charging a battery attached to a radio, turn the radio off to ensure a full charge.
3. Do not cut off the power supply or remove the battery when charging a battery.
4. Never charge a battery that is wet. Please dry it with a soft cloth prior to charge.
5. The battery will eventually wear out. When the operating time (talk-time and standby time) is noticeably shorter than normal performance, it is time to buy a new battery.

##### 7.3.-PROLONG BATTERY LIFE:


1. Battery performance will be greatly decreased at a temperature below 0°C. A spare battery is necessary in cold weather. The cold battery unable to work in this situation may work under room temperature, so keep it for later use.

► **ACCESSORY JACK:**

-The jack is used to connect audio accessories, or other accessories such as programming cable.

**9.-'LCD' DISPLAY:**

The display icons appear when certain operations or specific features are activated.

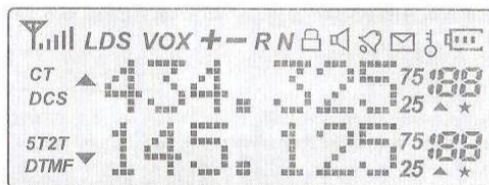

Icon	Description
	Operating channel.
	Operating frequency.
<b>CT</b>	'CTCSS' activated.
<b>DCS</b>	'DCS' activated.
<b>+ -</b>	Frequency offset direction for accessing repeaters.
<b>S</b>	Dual Watch/Dual Reception functions activated.
<b>VOX</b>	Function 'VOX' enabled.
<b>R</b>	Reverse function activated.
<b>N</b>	Wide Band selected.
	Battery Level indicator
	Keypad lock function activated.
<b>L</b>	Low transmit power.
	Operation frequency.
	Signal Strength Level.

**10.- 1750 Hz TONE FOR ACCESS TO REPEATERS:**

The user needs to establish long distance communications through an amateur radio repeater which is activated after receiving a 1750 Hz tone. Press and hold on the [PTT], then press the [BAND] button to transmit a 1750Hz tone.

**11.- BASIC OPERATION:**

**11.1.-RADIO ON-OFF/VOLUME CONTROL :**

-Make sure the antenna and battery are installed correctly and the battery charged.  
 -Rotate the knob clockwise to turn the radio on, and rotate the knob fully counter-clockwise until a 'click' is heard to turn the radio off. Turn the knob clockwise to increase the volume, or counter-clockwise to decrease the volume.



**11.2.- SELECTING A FREQUENCY OR CHANNEL:**

-Press the key [▲] or [▼] to select the desired frequency/channel you want. The display shows the frequency / channel selected.  
 -Press and hold down the key [▲] or [▼] for frequency up or down fast.

Note:

- You can not select a channel if not previously stored.

**12-ADVANCED OPERATION:**

You can program your transceiver operating in the setup menu to suit your needs or preferences.

**12.1.-SET MENU DESCRIPTION:**

Menu	Function/Description	Available settings
0	SQL (Squelch level)	0-9
1	STEP(Frequency step)	2.5/5/6.25/10/12.5/25kHz
2	TXP(Transmit power)	HIGH/LOW
3	SAVE( Battery save,1:1/1:2/1:3/1:4)	OFF/1/2/3/4
4	VOX(Voice operated transmission)	OFF/0-10
5	W/N( Wideband/narrowband)	WIDE/NARR
6	ABR(Display illumination)	OFF/1/2/3/4/5s
7	TDR(Dual watch/dual reception)	OFF/ON

### 12.7.- TOT(TRANSMISSION TIMER):

This function can automatically control the time we transmit each time you press [PTT] on the transceiver. This feature is very useful to avoid overheating excessive power transistors of the transceiver. The transceiver will be off transmission automatically once the set time.

### 12.8.-CTCSS/DCS:

In some cases only want to establish communications in a closed user group at a particular frequency or channel, for it will use "CTCSS" or code "DCS" for reception. The "squelch" opens only when receiving a frequency with "CTCSS" or codes "DCS" same as the programmed in your transceiver. If codes of the received signal differs from those programmed in your transceiver, the "squelch" will not open and the received signal can be heard.

#### Note:

- The use of "CTCSS" or "DCS" in a communication, does not guarantee complete confidentiality communication.

### 12.9.- ANI

-ANI (Automatic Number Identification) is also known as PTT ID because an ID is transmitted when the PTT button of the radio is pressed and/or released. This ID tells the dispatcher which field radio was keyed.

Only could be set by PC software.

### 12.10.- DTMFST (DTMF TONE OF TRANSMITTING CODE ):

First you should set the PTT-ID as BOT/EOT/BOTH

-"OFF"-Under transmitting mode, you can't hear the DTMF tone, while you press the key to transmit the code or code automatically transmitted.

-"DT-ST"-Under transmitting mode, you can hear the DTMF tone, while you press the key to transmit the code.

-"ANI-ST"-under transmitting mode, you can hear the DTMF tone, while the code automatically transmitted.

-"DT-ANI"-under transmitting mode, you can hear the DTMF tone, while you press the key to transmit the code or the code automatically transmitted.

### 12.11.- SC-REV(SCAN RESUME METHOD):

This transceiver allows you to scan memory channels, all the bands or part of the bands.

When the transceiver detects a communication, the scan will stop automatically.

#### Notes:

- "TO" (Time Operation):

Scanning will stop when it detects an active signal. The scanning will stop on each channel or active frequency for a predetermined time, after that time the scan will resume automatically.

- "CO" (Carrier Operation):

The scanning will stop and remain in the frequency or channel, until the active signal disappears.

- "SE"(Search Operation):

The scanning will stop and remain in the frequency or channel after it detects an active signal.

### 12.12.- PTT-ID(PTT OR RELEASE PTT TO TRANSMIT THE SIGNAL CODE):

-This feature allows you to know who call you.

-"OFF"-Don't transmit the code while push the PTT button.

-"BOT"-Transmit the code while push the PTT button.(the code only could be set by PC software.)

-"EOT"-Transmit the code while release the PTT button.

-"BOTH"-Transmit the code while push or release the PTT button.

### 12.13.- BCL(BUSY CHANNEL LOCKOUT):

The BCLO feature prevents the radio's transmitter from being activated if a signal strong enough to break through the "noise" squelch is present. On a frequency where stations using different CTCSS or DCS codes may be active, BCLO prevents you from disrupting their communications accidentally (because your radio may be muted by its own tone decoder).

### 12.14.- SFT-D(DIRECTION OF FREQUENCY SHIFT):

The "OFFSET" is the difference or offset between the reception frequency and the frequency of transmission for access to amateur radio repeaters. Set the "OFFSET" according to the "OFFSET" amateur radio repeater through which want to communicate.

### 12.15.- OFFSET(FREQUENCY SHIFT):

When communicating via a repeater, the direction of displacement of frequency should be timed to the displacement of the transmission frequency is higher or lower than the receiving frequency.

example:

If we want to make a communication through amateur radio repeater whose frequency input is 145,000 MHz and 145,600 MHz is output, we select the "OFFSET" of the previous section in 0600 and the direction of travel "SHIFT" programmed to [-], so the transceiver will always 145,600 MHz in frequency and when you press [PTT] to transmit transceiver, the frequency will automatically move to . 145,000 MHz

### 12.16.-STE (TAIL TONE ELIMINATION):

This function is used to activate or deactivate the transmission end of the transceiver. this final tone transmission only be used in communications between transceivers and not in communications through a repeater, which must be deactivated.

### 13.-CTCSS TABLE:

Nº	Tone(Hz)	Nº	Tone(Hz)	Nº	Tone(Hz)	Nº	Tone(Hz)	Nº	Tone(Hz)
1	67.0	11	94.8	21	131.8	31	171.3	41	203.5
2	69.3	12	97.4	22	136.5	32	173.8	42	206.5
3	71.9	13	100.0	23	141.3	33	177.3	43	210.7
4	74.4	14	103.5	24	146.2	34	179.9	44	218.1
5	77.0	15	107.2	25	151.4	35	183.5	45	225.7
6	79.7	16	110.9	26	156.7	36	186.2	46	229.1
7	82.5	17	114.8	27	159.8	37	189.9	47	233.6
8	85.4	18	118.8	28	162.2	38	192.8	48	241.8
9	88.5	19	123.0	29	165.5	39	196.6	49	250.3
10	91.5	20	127.3	30	167.9	40	199.5	50	254.1

#### 14.-DCS TABLE:

N°	Code	N°	Code	N°	Code	N°	Code	N°	Code
1	D023N	22	D131N	43	D251N	64	D371N	85	D532N
2	D025N	23	D132N	44	D252N	65	D411N	86	D546N
3	D026N	24	D134N	45	D255N	66	D412N	87	D565N
4	D031N	25	D143N	46	D261N	67	D413N	88	D606N
5	D032N	26	D145N	47	D263N	68	D423N	89	D612N
6	D036N	27	D152N	48	D265N	69	D431N	90	D624N
7	D043N	28	D155N	49	D266N	70	D432N	91	D627N
8	D047N	29	D156N	50	D271N	71	D445N	92	D631N
9	D051N	30	D162N	51	D274N	72	D446N	93	D632N
10	D053N	31	D165N	52	D306N	73	D452N	94	D645N
11	D054N	32	D172N	53	D311N	74	D454N	95	D654N
12	D065N	33	D174N	54	D315N	75	D455N	96	D662N
13	D071N	34	D205N	55	D325N	76	D462N	97	D664N
14	D072N	35	D212N	56	D331N	77	D464N	98	D703N
15	D073N	36	D223N	57	D332N	78	D465N	99	D712N
16	D074N	37	D225N	58	D343N	79	D466N	100	D723N
17	D114N	38	D226N	59	D346N	80	D503N	101	D731N
18	D115N	39	D243N	60	D351N	81	D506N	102	D732N
19	D116N	40	D244N	61	D356N	82	D516N	103	D734N
20	D122N	41	D245N	62	D364N	83	D523N	104	D743N
21	D125N	42	D246N	63	D365N	84	D526N	105	D754N

#### 15.-TECHNICAL SPECIFICATION:

##### 15.1.-GENERAL:

Frequency range	65MHz-108MHz(Only commercial FM radio reception) VHF:136MHz-174MHz (Rx/Tx),UHF:400MHz-480MHz (Rx/Tx)
Memory channels	Up to 128 channels
Frequency stability	2.5ppm
Frequency step	2.5kHz/5kHz/6.25kHz/10kHz/12.5kHz/25kHz
Antenna impedance	50 Ω
Operating temperature	-20 °C to +60 °C
Supply voltage	Rechargeable Lithium-Ion mAh 7.4V/1800
Consumption in standby	≤75mA
Consumption in reception	380mA
Consumption in transmission	≤1.4 A
Mode of operation	Simplex or semi-duplex
Duty cycle	03/03/54 min. (Rx / Tx / Standby)
Dimensions	58mm x 110mm x 32mm
Weight	130 g (approximate)

##### 15.2. - TRANSMITTER:

RF power	4W/1W
Type of modulation	FM
Emission class	16KΦF3E/11KΦF3E (W/N)
Maximum deviation	≤ ± 5 kHz/≤ ± 2.5 kHz (W/N)
Spurious emissions	<-60 dB

##### 15.3. - RECEIVER:

Receiver sensitivity	0.2 μ V(at 12 dB SINAD)
Intermodulation	60 dB
Audio output	1000mW
Adjacent channel selectivity	65/60dB

##### Note:

- All specifications shown are subject to change without notice.

**16.-TROUBLESHOOTING:**

Problem	Possible cause / solution
The radio does not start.	The battery is low, replace the battery with a charged battery or proceed to the battery. The battery is not installed correctly, remove the battery and reattach it.
The battery runs down quickly.	The battery life has come to an end, replace the battery with a new one. The battery is fully charged, make sure the battery is made in full.
The receiving indicator LED lights but do not hear the speaker.	Make sure the volume setting is too low. Make sure the undertones "CTCSS" or code "DCS" are the same as those programmed in the transceiver of the other members of your group.
When transmitting, the other members of his group do not receive the communication.	Make sure the undertones "CTCSS" or code "DCS" programmed in your transceiver are the same as those programmed in the transceiver of the other members of your group. Your partner or you, are too far. You or your partner are in a bad area of RF signal propagation.
In "standby" mode, the transceiver transmits without pressing the "PTT".	Check the level adjustment function "VOX" is not set too sensitive.
Receive communications from other user groups while communicating with your group.	Change frequency or channel. Change the undertones "CTCSS" or code "DCS" in your group.
Communication with other members of your group is poor or low quality.	You or your partner is too far away or in an area of poor radio signal propagation, such as inside a tunnel, inside an underground car park, in a mountainous area, including large metal structures, etc..
Once these checks, if you still have problems with the transceiver, check with your distributor, dealer or service center.	

**17.-WARRANTY: (Better buy the radios from local dealer).**

WARRANTY CERTIFICATE		
Brand:	Model no.:	Serial no.:
Name of purchaser:		
Address:		Seal and name of the dealer:
City:	Zip code:	
Province/State:	Tel no.:	
Date of purchase:		
<b>WARNING:</b> Warranty is valid provided it is complete and properly filled in legibly and clearly present the seal and name of the dealer and have attached the bill proof of purchase of equipment.		

The device described in this Certificate is guaranteed for a period of one year from the date of sale to the final user. This Warranty Certificate is unique and not transferable and may not be reissued for new or original or copy. Substitution of product failure or any part thereof shall not involve extension of the guarantee.

The warranty covers the replacement and free replacement of all parts that are defective in materials and components used in manufacturing and / or assembly of the apparatus.  
The warranty does not cover any faults caused by accident, improper installation and use, electric shock (eg storms), connect a power other than that specified, reverse polarity in the diet, or claims due to deterioration in the external appearance of normal use, nor the amount or condition of the accessories.  
Checking the accessories is the responsibility of the purchaser at the time of purchasing the device.  
The warranty does not cover rechargeable batteries even if they are part of the equipment purchased as they are considered consumables, the impairment must be reported within a period of fifteen days from the date of purchase.

The warranty is void on the following assumptions:

1. - Devices that have been manipulated by another or by anyone other than authorized service provider.
2. - Equipment and accessories in which the serial number has been altered, deleted or filed unreadable.
3. - Use of the product than as intended.

To make use of the guarantee is necessary to give the dealer or any of the Authorised Service the defective device with its accessories and the following documentation:

1. - Warranty Certificate duly completed and sealed.
2. - Original invoice which clearly identifies the device and the date of purchase.
3. - Description of the faults.

The warranty terms contained in this Certificate of Guarantee do not exclude, modify or restrict the statutory rights of the buyer by virtue of the laws in force at the time of purchase, but are added to them.

# www.miklor.com



## Welcome to Miklor

Information, FAQs, Software,  
Drivers, and Programming Support  
for the following radios...



[UV-5R](#)

[UV-5R, UV-E5, F-11](#)



[UV-B5](#)

[UV-B5, B6](#)



[UV-3R \(+\)](#)



[UV-82](#)

[UV-82 vs UV-5R](#)



[BF-888S](#)

[UHF 400-470MHz](#)

[Alinco](#)  
[Kenwood](#)  
[Puxing](#)  
[TYT](#)  
[Wouxun](#)  
[Yaesu](#)

[http://www.miklor.com/COM/UV\\_CHIRP.php](http://www.miklor.com/COM/UV_CHIRP.php)

## ***CHIRP Features***

CHIRP software has many features, some of which are not available using the Baofeng factory software, such as:

- Uses the familiar RX frequency and  $\pm$  Offset for repeaters
- Allows 7 Character Alpha Tags (was only 6)
- Allows Personalizing Display Messages [Power-on Messages](#)
- Upper & Lower Band Limits for TX on VHF & UHF
- TX Inhibit for Scanner Only frequencies
- Remembers the COM port setting between sessions
- Remembers the last folder loaded from or saved to between sessions
- Supports serial ports up to COM256
- Displays the actual Firmware release on UV5R series



# Chirp Software

CHIRP

File Edit View Radio Help

Baofeng UV-5R: baofeng082013.img X

Memories Memory range: 0 - 25 Go  Special Channels  Show Empty

Settings	Loc	Frequency	Name	Tone Mode	Tone	ToneSql	DTCS Code	DTCS Rx Code	DTCS Pol	Cross Mode	Duplex	Offset	Mode	Power	Skip
	0	147.210000	FRRL V	Tone	103.5	88.5	023	023	NN	Tone->Tone	+	0.600000	FM	High	S
	1	461.625000	AH RC	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	NFM	Low	
	2	461.450000	AH CH1	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	NFM	Low	
	3	441.575000	BMW	TSQL	103.5	103.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	High	
	4	146.520000	52CALL	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	High	S
	5	145.770000	145 77	TSQL	103.5	103.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	High	S
	6	146.980000	TOELE	(None)	88.5	88.5	023	023	NN	Tone->Tone	-	0.600000	FM	High	S
	7	146.620000	FARNS	(None)	88.5	88.5	023	023	NN	Tone->Tone	-	0.600000	FM	High	S
	8	449.350000	TOELE	TSQL	100.0	100.0	023	023	NN	Tone->Tone	-	5.000000	FM	High	S
	9	146.940000	FARNS	Tone	88.5	88.5	023	023	NN	Tone->Tone	-	0.600000	FM	High	S
	10	147.120000	FARNS	TSQL	100.0	100.0	023	023	NN	Tone->Tone	+	0.600000	FM	High	S
	11	448.150000	FARNS	TSQL	127.3	127.3	023	023	NN	Tone->Tone	-	5.000000	FM	High	S
	12	145.470000	KANE	TSQL	103.5	103.5	023	023	NN	Tone->Tone	-	0.600000	FM	High	S
	13	162.400000	WX 1	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	Low	S
	14	162.425000	WX 2	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	Low	S
	15	162.450000	WX 3	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	Low	S
	16	162.475000	WX 4	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	Low	S
	17	162.500000	WX 5	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	Low	S
	18	162.525000	WX 6	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	Low	S
	19	162.550000	WX 7	(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.000000	FM	Low	S
	20	0.000000		(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.600000	FM		
	21	0.000000		(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.600000	FM		
	22	0.000000		(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.600000	FM		
	23	0.000000		(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.600000	FM		
	24	0.000000		(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.600000	FM		
	25	0.000000		(None)	88.5	88.5	023	023	NN	Tone->Tone	(None)	0.600000	FM		

[0] Completed Getting memory 127 (idle)

# Chirp – Repeater Book Search

CHIRP

File Edit View Radio Help

Baofeng UV-SR: Setp0913r.img X RepeaterBook: X

Memories Memory range: 0 - 25 Go  Special Channels  Show Empty

D-STAR	Loc	Frequency	Name	Tone	Mode	Tone	ToneSql	DTCS Code	DTCS Pol	Duplex	Offset	Mode	Tune Step	Skip	Comment	URCALL	RPT1CALL	RPT2CALL	Digital Code	
	0	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	1	53.290000	W7FHZ	Tone	100.0	88.5	023	NN	-	1.000000	FM	5.0			Quilcene, Buck Mountain					
	2	145.150000	N7UTB	Tone	114.8	88.5	023	NN	-	0.600000	FM	5.0			Port Townsend					
	3	147.280000	K7PP	Tone	123.0	151.4	023	NN	+	0.600000	FM	5.0			Forks, Mount Octopus					
	4	224.580000	K5IN	Tone	100.0	88.5	023	NN	-	1.600000	FM	5.0			Quilcene, Buck Mountain					
	5	440.500000	K5IN	Tone	131.8	88.5	023	NN	+	5.000000	FM	5.0			Quilcene					
	6	440.925000	W7GLB	Tone	103.5	88.5	023	NN	+	5.000000	FM	5.0			Port Townsend					
	7	441.125000	WB0CZA	Tone	123.0	88.5	023	NN	+	5.000000	FM	5.0			Quilcene, Buck Mountain					
	8	441.200000	K7PP	(None)	88.5	88.5	023	NN	+	5.000000	FM	5.0			Quilcene, Buck Mountain					
	9	441.575000	N7PL	Tone	103.5	88.5	023	NN	+	5.000000	FM	5.0			Port Ludlow					
	10	442.525000	WR7V	Tone	103.5	88.5	023	NN	+	5.000000	FM	5.0			Matts Mats					
	11	443.400000	K7PP	Tone	123.0	88.5	023	NN	+	5.000000	FM	5.0			Quilcene, Buck Mountain					
	12	443.425000	WO7O	Tone	103.5	88.5	023	NN	+	5.000000	FM	5.0			Quilcene, Hood Canal					
	13	443.825000	N7WGR	Tone	88.5	88.5	023	NN	+	5.000000	FM	5.0			Port Townsend					
	14	444.300000	WA7WKT	Tone	103.5	88.5	023	NN	+	5.000000	FM	5.0			Quilcene, Buck Mountain					
	15	927.400000	WB0CZA	Tone	123.0	123.0	023	NN	-	25.000000	FM	5.0			Quilcene, Buck Mountain					
	16	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	17	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	18	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	19	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	20	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	21	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	22	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	23	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	24	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									
	25	0.000000	(None)	88.5	88.5	023	NN	(None)	0.600000	FM	5.0									

Click here to begin [D] Completed Getting memory 1000 (idle)

# VIP Software – Channel Information

Channel Information

Channel	Band	RX Frequency	TX Frequency	CTCSS/DCS Dec	CTCSS/DCS Enc	TX Power	W/N	PTT-ID	BusyLock	Scan_Add	SigCode	CH-Name
0												
1												
2												
3												
4												
5												
6												
7												
8												
9												
10												
11												
12												
13												
14												
15												
16												
17												
18												
19												
20												
21												
22												
23												
24												
25												
26												
27												
28												

Default Clear Close

# VIP Software - Features

**Optional Features**

Time Out Timer(TOT)[S] 60  
Squelch Level 3  
VOX OFF  
Voice Annunciation English  
ABR 5

Work Mode  
 Frequency  Channel CHT 128

Channel Mode  
 Menu  Reset  
A Channel Disp Way Channel+Frequency  
B Channel Disp Way Channel+Frequency

DTMF-ST KB DTMFST + Send ANI DTM  
Save 1:3  
Scan\_Rev T0  K\_Lock  
PTT\_ID OFF  Auto Lock  
PTT\_Delay 5  BCL  
 Beep

**A Band Frequency Mode**  
Frequency 136.02500 MHZ  
Band VHF  
Freq Range 136 - 173.99750  
TX Power HIGH  
RX QT/DQT OFF  
TX QT/DQT OFF  
W/N WIDE  
Step Frequency 20.00 KHZ  
SFT\_D OFF  
Offset 00.000M MHZ  
Signal Code 1

**B Band Frequency Mode**  
Frequency 470.62500 MHZ  
Band UHF  
Freq Range 400 - 519.99750  
TX Power HIGH  
RX QT/DQT OFF  
TX QT/DQT OFF  
W/N WIDE  
Step Frequency 20.00 KHZ  
SFT\_D OFF  
Offset 00.000M MHZ  
Signal Code 1

Work Band  
Wait Back Light Purple  
RX Back Light Blue  
TX Back Light Orange  
Tail noise Clear ON  
Pass Rept noise 500  
Pass Rept noise(ms) OFF  
Power On Disp Full

FM Radio Enabled  
 Alarm Sound  
Alarm Mode TONE  
Roger OFF  
TX Under TDR Star OFF  
 TDR

Default Close

# VIP Software - Other

Other

Adjustable frequency range

Band	Max frequency range (MHz)	Limit frequency range (MHz)	Allow transmit
VHF0	136 - 174	From <input type="text" value="136"/> to <input type="text" value="174"/>	<input checked="" type="checkbox"/>
UHF0	400 - 520	From <input type="text" value="400"/> to <input type="text" value="479"/>	<input checked="" type="checkbox"/>

Power On Message

More than 480 MHz to allow transmit  
 Work Band: 136 - 174 MHz / 400 - 520 MHz

# Keypad Memory Programming

## Baofeng UV-5R

To program repeater 146.985, minus offset, 100 Hz tone, low power level, into Channel#010



Turn on radio.

If in Memory Mode switch to VFO Mode (VFO/MR)

Select 5 KHz Step - (MENU + 1 + MENU) (Use the ▲ ▼ key for 5K) (MENU + EXIT)

Enter	146.985	The receive frequency
Press [MENU] + 2 + [MENU]		Use the ▲ ▼ key to select Low Power
Press [MENU] + [EXIT]		To accept and exit
Press [MENU] + 5 + [MENU]		Use the ▲ ▼ key to select Wide Bandwidth
Press [MENU] + [EXIT]		To accept and exit
Press [MENU] + 1 + 3 + [MENU]		Use the ▲ ▼ key to select 100 Hz Tone
Press [MENU] + [EXIT]		To accept and exit
Press [MENU] + 2 + 7 + [MENU]		Enter 010 or Use the ▲ ▼ key to select 010
Press [MENU] + [EXIT]		This stores the Receive Frequency
		Radio prompts that REC FREQ has been stored
Enter	146.385	The transmit frequency
Press [MENU] + 2 + 7 +		
[MENU] + [MENU] + [EXIT]		Radio prompts that TX FREQ has been stored

**Return to Memory Mode (VFO/MR)**

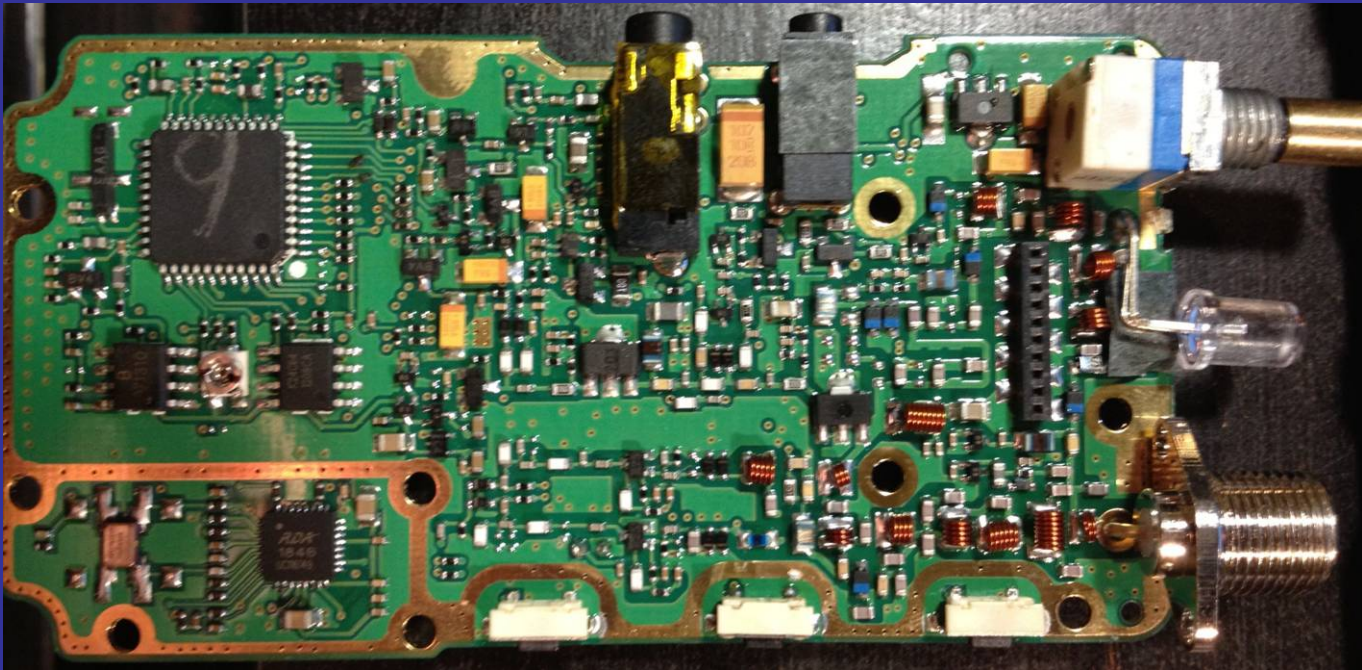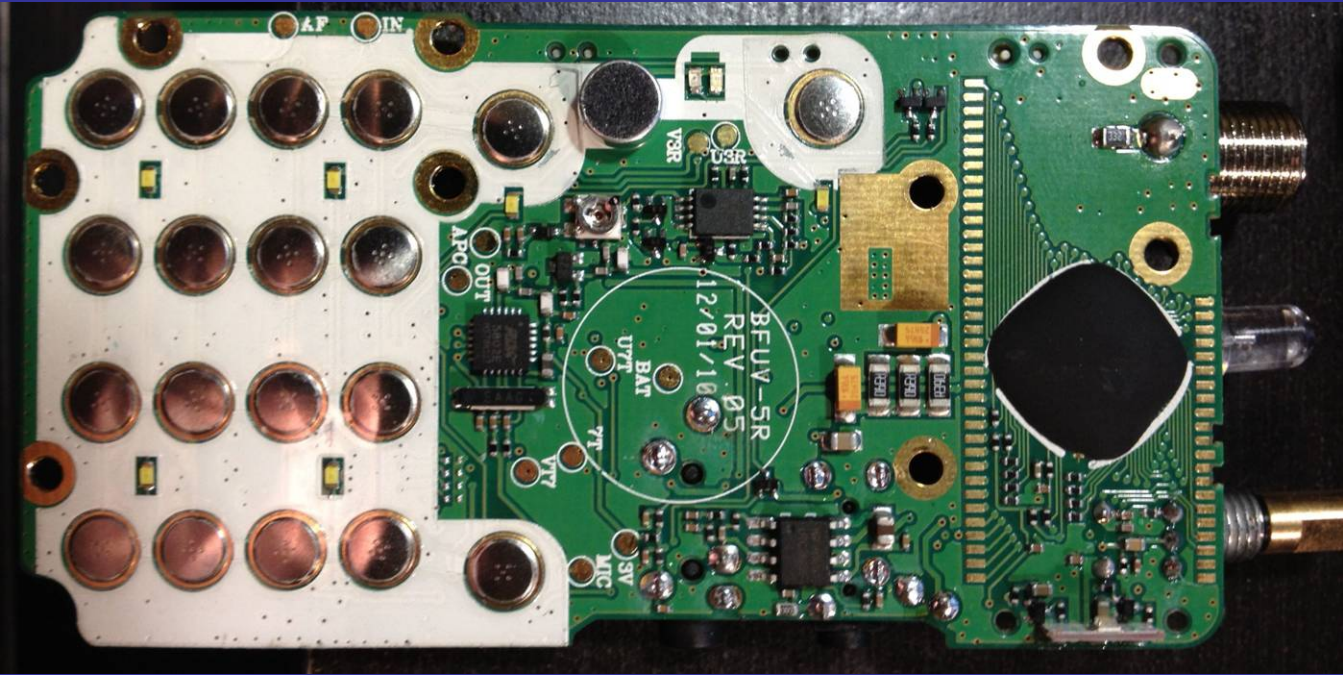

## SINGLE CHIP TRANSCEIVER FOR WALKIE TALKIE Rev.1.2–Dec.2009

### 1. General Description

The RDA1846 is a highly integrated single-chip transceiver for Walkie Talkie applications. It totally realizes the translation from RF carrier to voice in the RX path and from voice to RF carrier in the TX path, requiring only one micro controller.

The RDA1846 has a powerful digital signal processor, which makes it have optimum voice quality, flexible function options, and robust performance under varying reception conditions.

The RDA1846 can be tuned to the worldwide frequency band for Walkie Talkie from 400MHz to 500MHz and especially from 134MHz to 174MHz which meets the frequency band of weather broadcast.

The transceiver uses the CMOS process with a package size of 5X5mm. By virtue of its high integration, it requires the least external components and eliminates the complicated design of sensitive RF circuits on PCB.

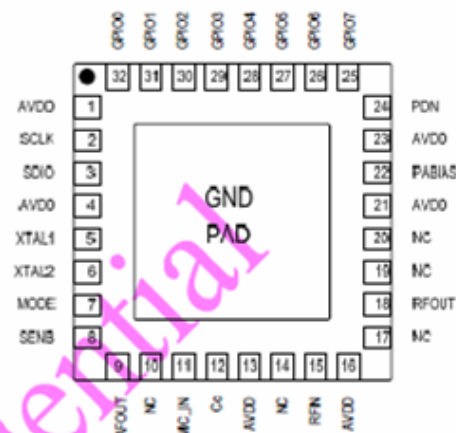


Figure 1.1 RDA1846 Top View

#### 1.1 Features

- CMOS single-chip fully-integrated transceiver
- Fully integrated frequency synthesizer and VCO
- Support worldwide frequency band
  - 134MHz ~ 174MHz
  - 400MHz ~ 500MHz
- 12.5KHz, 25KHz channels
- Support multiple XTAL clocks
  - 12.8/25.6Mhz
  - 13.26Mhz
- Digital auto frequency control (AFC)
- Digital auto gain control (AGC)
- Selectable pre/de-emphasis
- Received signal strength indicator (RSSI)
- VOX and SQ
- Build-in CTCSS/CDCSS generator and judgment
  - CTCSS with 120/180 /240 degree phase shift
  - 23/24 bit programmable DCS code
- DTMF and programmable in-band dual tone
- Programmable in-band single tone transmitter
- Auto RX/TX/SLEEP state switching
- 8 GPIOs
- 3-wire/4-wire I<sup>2</sup>C serial control bus interface
- On chip 8 dBm PA
- Analog and digital volume control
- Directly support 32Ω resistance loading
- 3.3 to 4.8 V supply voltage with Integrated LDO
- 5X5 mm 32 pin QFN package

#### 1.2 Applications

- Cellular handsets
- Family radio services
- Walkie Talkies



## 8. Application Diagram


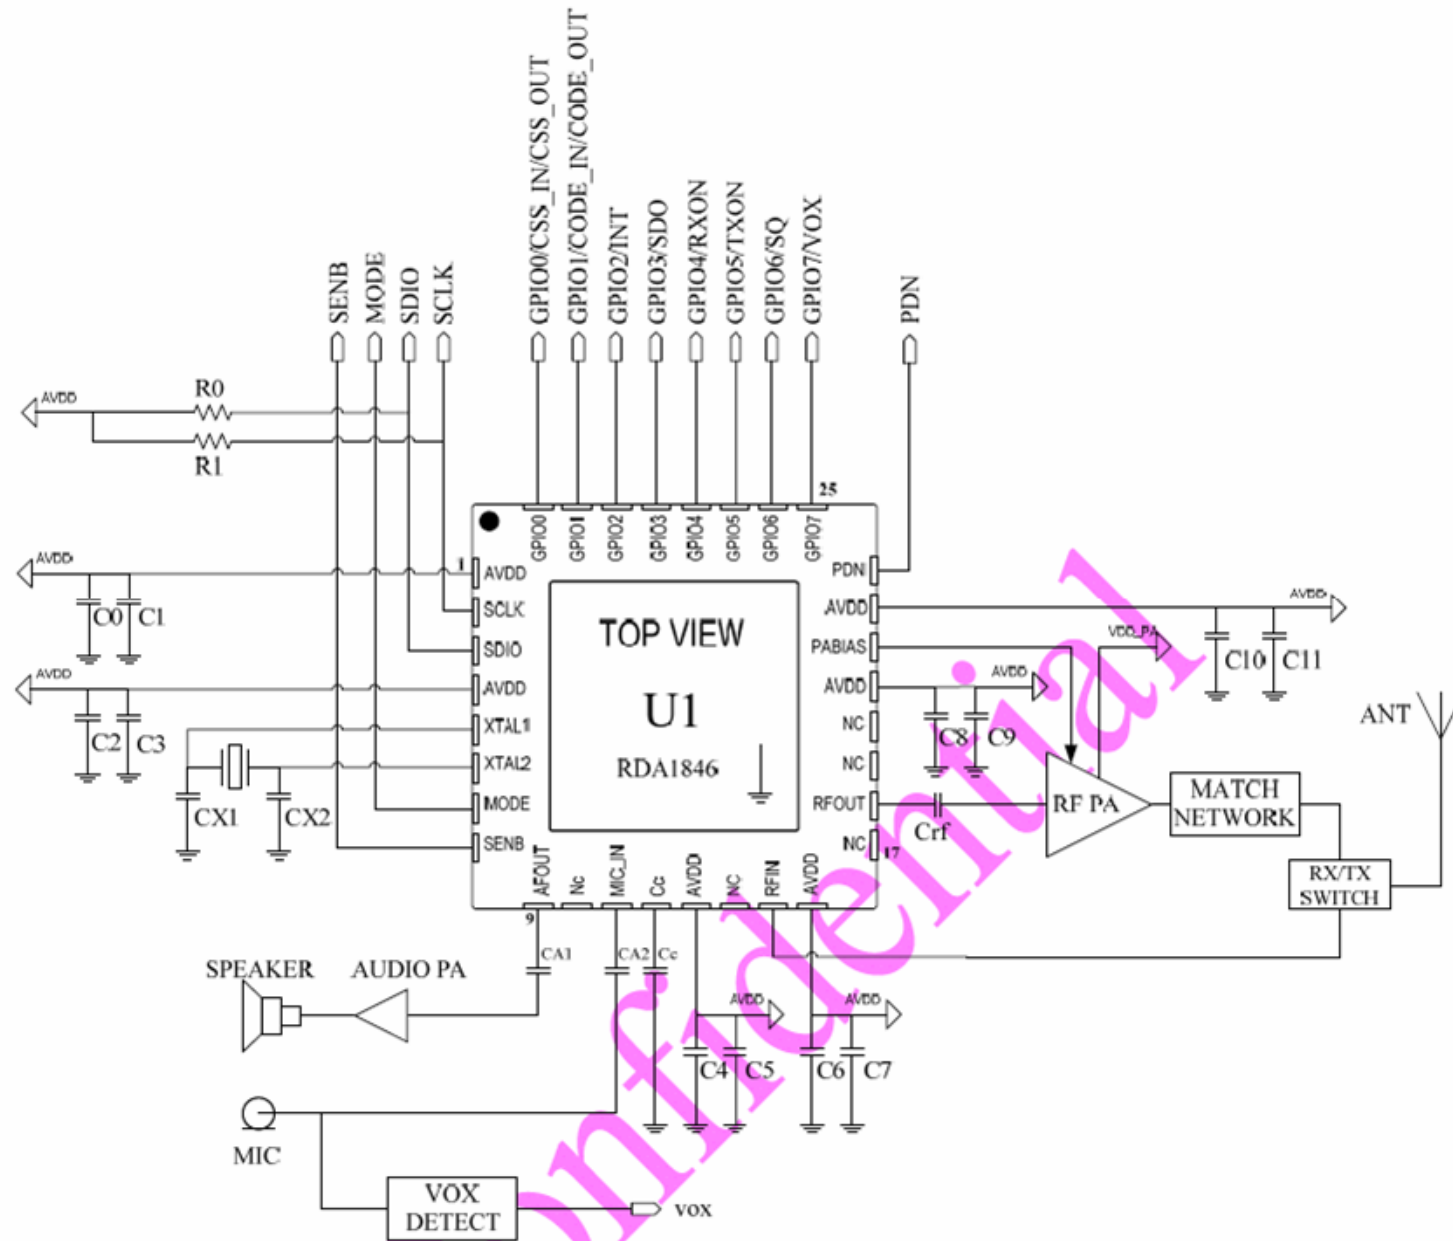


Figure 8.1 RDA1846 Application Diagram





# Harmonic Filtering

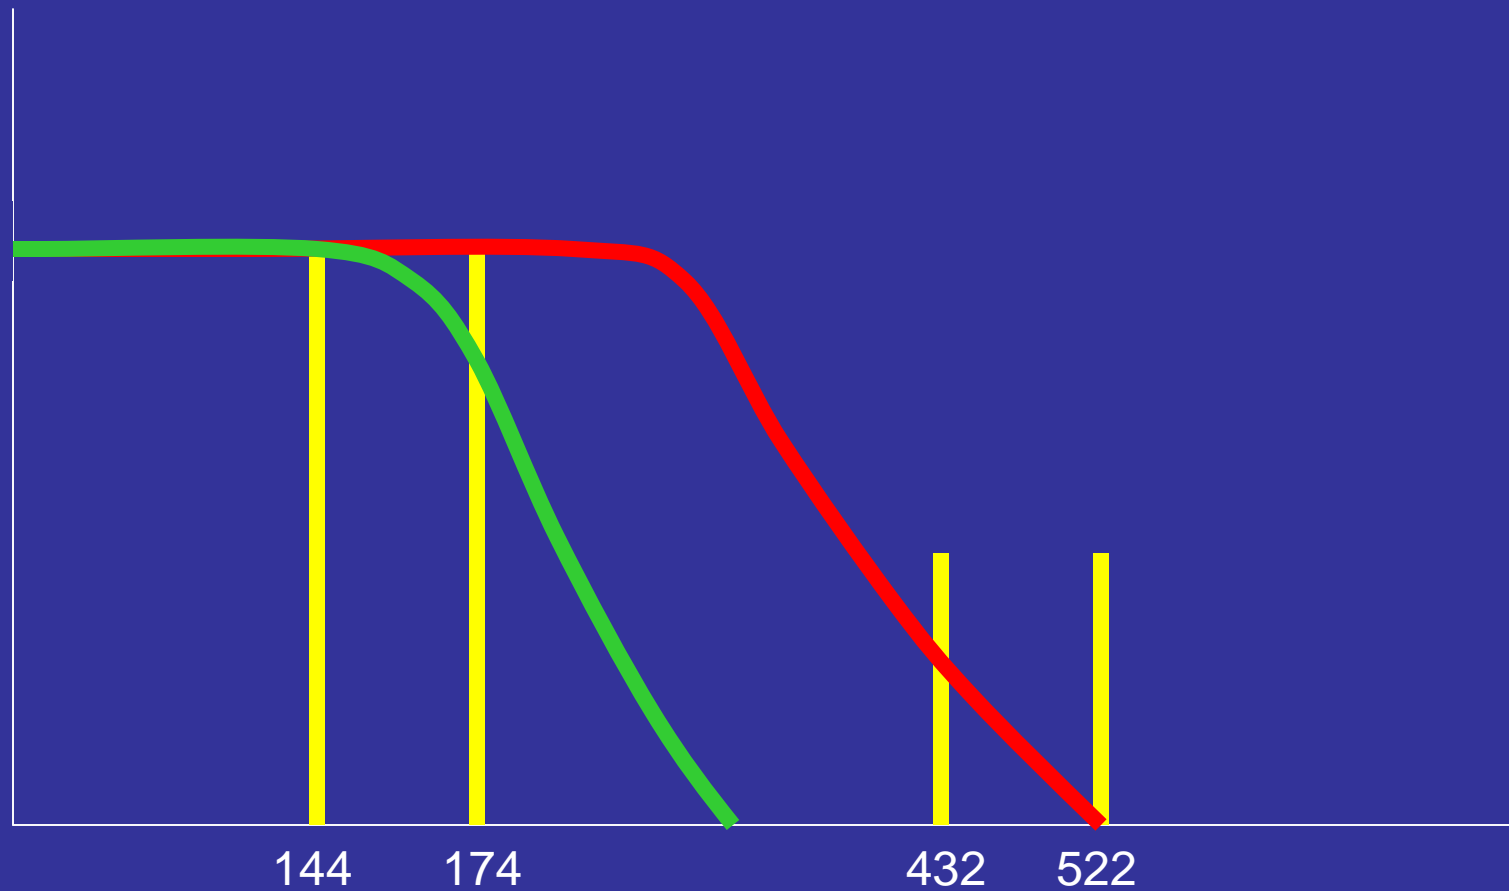

This document was created with Win2PDF available at <http://www.win2pdf.com>.  
The unregistered version of Win2PDF is for evaluation or non-commercial use only.  
This page will not be added after purchasing Win2PDF.